Power Distribution Unit - 0U

Installation configurations:

The 19" - 1U PDU's designed for installation in server and cabling racks

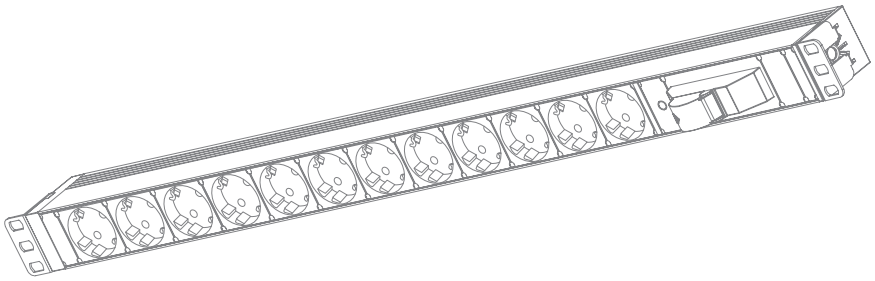

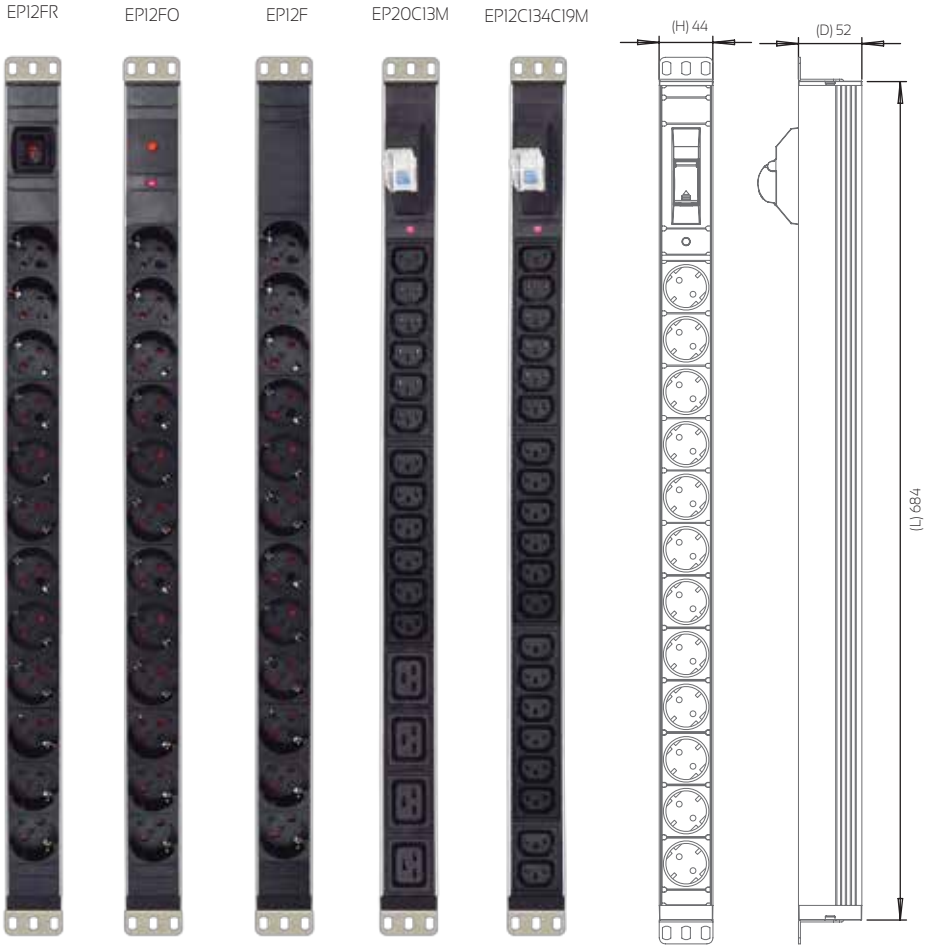

Power & Temperature:

Operating voltage: 230VAC 50VHz
Maximum current: 16A
Work Temperature: up to 70°C

Structure & color:

Solid and durable structure, you will find Eufficio PDU reliable unit with long life expectation.
Materials: housing - aluminium, sockets - PC.

Modules & combination:

The Eufficio PDU can be configured with MCB/RCCB/C13/C19/indication led

Cable and connection to power:

The Eufficio PDU Has Built in input cable (HO5VV-F) with UK plug/CEE plug
Testing: 100% testing continuity, polarity, insulation & earth
Certifications: CE
Warranty: 3 years Warranty
Installation: supplied with installation brackets for attaching to rack in various angels. Please read the installation instruction prior to installation.
Packing: each item in a box

Catalog No	Model	Output receptacles	Input plug type	Cord Type	Cord length	Protection	Led Indication
0727363255617	EP12F	12 x EU	EU	3X1.5mm²	5m	——	——
0727363255624	EP12F	12 x EU	CEE	3X2.5mm²	5m	——	——
0727363255631	EP12FO	12 x EU	EU	3X1.5mm²	5m	Over-Load	✓
0727363255648	EP12FO	12 x EU	CEE	3X2.5mm²	5m	Over-Load	✓
0727363255655	EP12FR	12 x EU	EU	3X2.5mm²	5m	Rocker	✓
0727363256911	EP20C13M	20 x C13	CEE	3X1.5mm²	5m	MCB	✓
0727363256928	EP12C134C19M	12 x C13 + 4 x C19	CEE	3X2.5mm²	5m	MCB	✓