






⚠ ATTENTION: Read the instructions prior to installation.

Components:

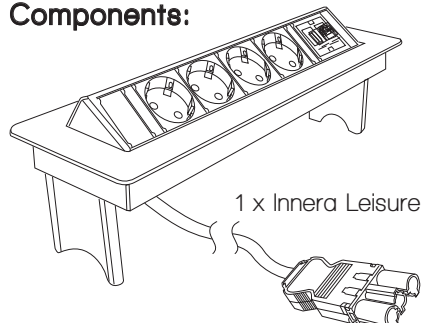


Tools required:

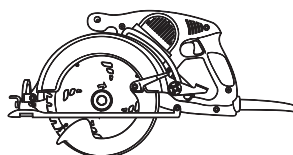

Power Saw



Hole Cutter




Power Drill


Critical safety Information:

- Prior of use, please examine and verify that the product is not defected. Please do not install or operate if there is a defect of any kind.
- If in any case you are facing misunderstanding of installation procedure, the installation should be carried out by certified electrician
- Make sure you are installing the product on smooth straight surface. Do not install in any case that the surface is not straight or if there are levels differences.
- Make sure water will not penetrate into the unit. In any case please make sure you are installing the unit, where proper leakage protection device is connected.


Installation:

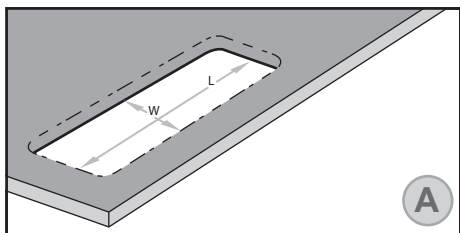


Drill hole into the surface according to the **INSTALLATION TABLE** on page 2. Please verify your purchased item's model No and drill the hole according to the model's cutout dimensions.

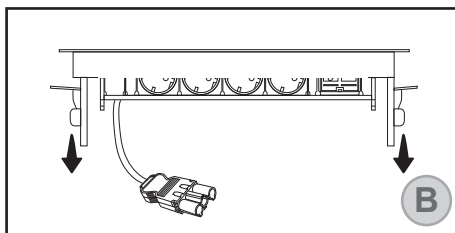


Remove the locking Handles by pulling & Pushing it down the rail before you are Inserting the Innera Leisure into the hole.

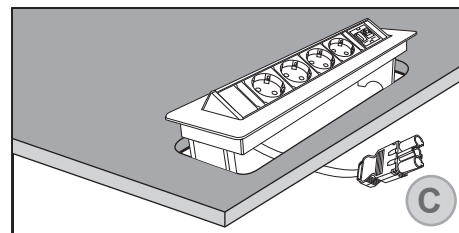


Insert the Innera Leisure into the hole.

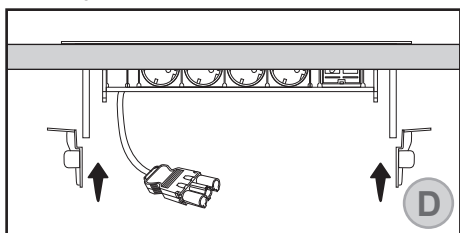


Tight the locking handles by install it on the rails and push it up to the surface.

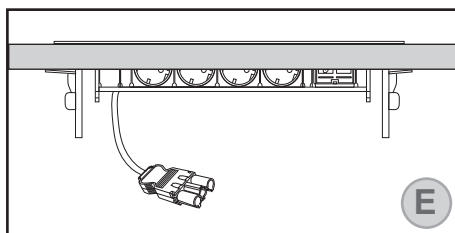

Tight the handles strongly to the surface and verify the Innera Leisure is firmed and cannot be rotated.

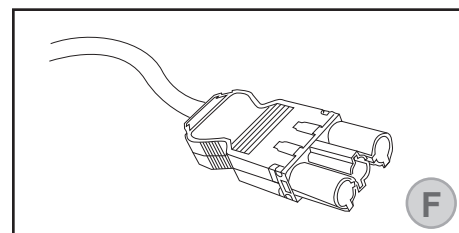


Connect the GST Male connector to power and the Innera Leisure is ready for use.

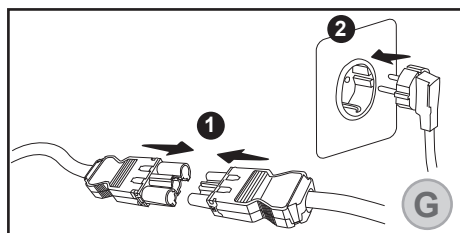


REMARK: In case you need to connect the Innera Leisure to a standard socket, you should buy a **starter cable** separately which not included in this Kit and connect it according to illustration above.

Operation:

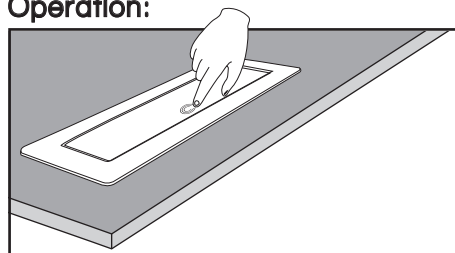


For use, press the cover.

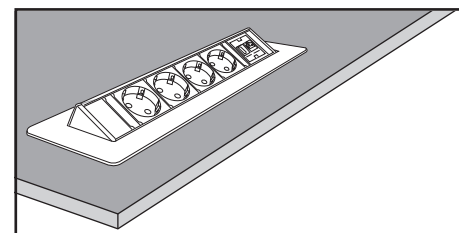

The Innera Leisure is ready for use

Cleaning:

The product can be cleaned by a soft and dry fabric. Please do not use moisture, abrasives materials, solvents or any detergents which can be conductive

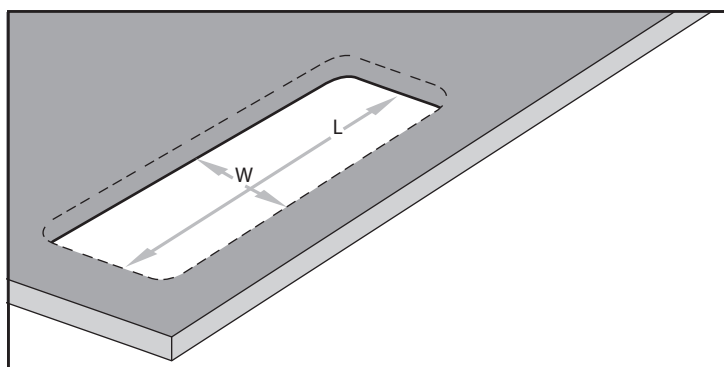

INSTALLATION TABLE:

Catalog No	Model	Description	Cutout Hole	
			Length mm (L)	Width mm (W)
0769978897646	IL-33F	3 F Type sockets	223.5	90.5
0769978897653	IL-32F	2 F Type sockets & 2 Keystones	223.5	90.5
0769978897660	IL-44F	4 F Type sockets	266.5	90.5
0769978897677	IL-43F	3 F Type sockets & 2 Keystones	266.5	90.5
0769978898117	IL-42F	2 F Type sockets & 4 Keystones	266.5	90.5
0726811930090	IL-42CF	2 F Type sockets, 2.4A USB Charge, 2 Keystones	266.5	90.5
0769978898124	IL-55F	5 F Type sockets	309.5	90.5
0769978898131	IL-54F	4 F Type sockets & 2 Keystones	309.5	90.5
0769978898148	IL-53F	3 F Type sockets & 4 Keystones	309.5	90.5
0726811930113	IL-53CF	3 F Type sockets, 2.4A USB Charge, 2 Keystones	309.5	90.5
0769978898155	IL-52F	2 F Type sockets & 6 Keystones	309.5	90.5