




⚠ ATTENTION: Read the instructions prior to installation.


Components:

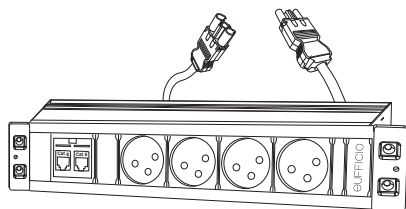

1 x Innera Piatto




2 x Cover screws




4 x Screws

Tools required:



Power Saw



Hole Cutter




Power Drill


Critical safety information:

- Prior of use, please examine and verify that the product is not defected. Please do not install or operate if there is a defect of any kind.
- If in any case you are facing misunderstanding of installation procedure, the installation should be carried out by certified electrician
- Make sure you are installing the product on smooth straight surface. Do not install in any case that the surface is not straight or if there are levels differences.
- Make sure water will not penetrate into the unit. In any case please make sure you are installing the unit, where proper leakage protection device is connected.


Installation:

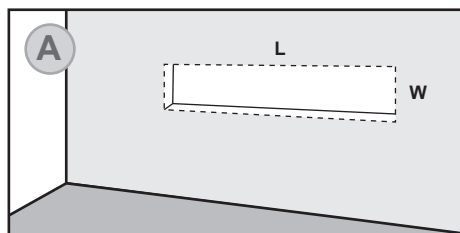


Drill hole into the surface according to the INSTALLATION TABLE on page 2. Please verify your purchased item's model No and drill the hole according to the model's cutout dimensions.

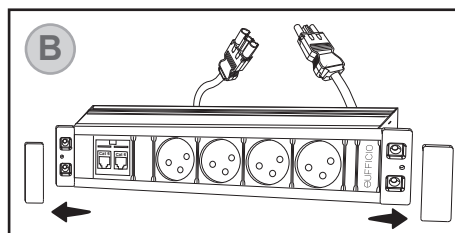


Remove the screws cover by sliding it to the sides.

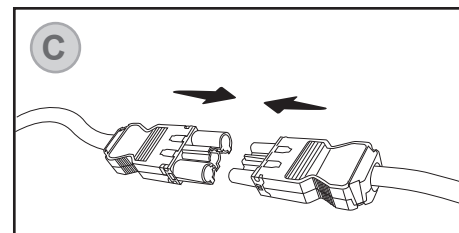


Connect the GST Male connector to power.

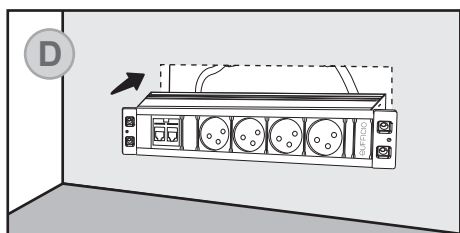

Insert the Innera Piatto into the hole.

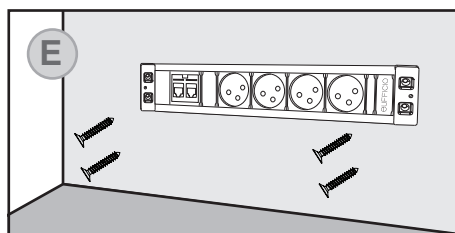


Using screw driver install the 4 screws.

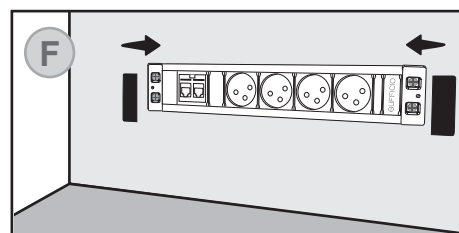

Install the screws cover by sliding it to the sides.



Operation:

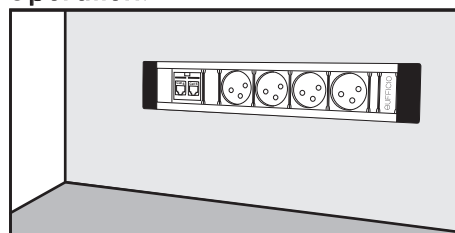

The Innera Piatto is ready to use.

Cleaning:

The product can be cleaned by a soft and dry fabric. Please do not use moisture, abrasives materials, solvents or any detergents which can be conductive

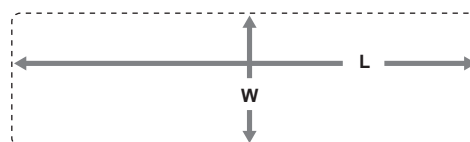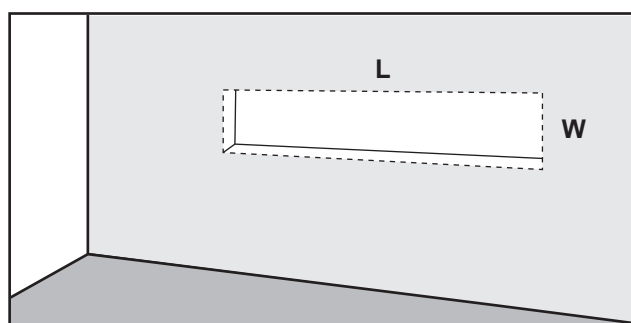

INSTALLATION TABLE:

Catalog No	Model	Description	Cutout Hole	
			Length mm (L)	Width mm (W)
0726811931813	IP-20	4 keystone adapters	142	53
0726811931820	IP-40	8 keystone adapters	228	53
0727363257086	IP-22	2 IL sockets	163	53
0769978901992	IP-32	2 IL sockets , 2 keystone adapters	206	53
0769978901787	IP-32C	2 IL sockets, USB charging module	206	53
0726811932087	IP-54	4 IL sockets , 2 keystone adapters	292	53
0769978897721	IP-54R	4 IL sockets , 2 keystone adapters with rocker switch	292	53
0769978897752	IP-44	4 IL sockets	249	53
0727363256416	IP-44R	4 IL sockets, IP+N switch	350	53
0727363256423	IP-44	4 IL red sockets (UPS)	249	53
0727363256430	IP-44R	4 IL red sockets (UPS), IP+N switch	350	53