


Power Distribution Unit - 1U

Installation configurations:

The 19" - 1U PDU's designed for installation in server and cabling racks

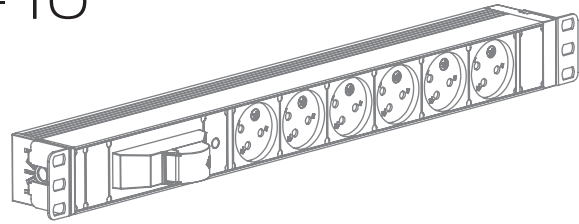

EP6ILM



EP6ILR




EP9IL



EP6C19M



EP12C13M

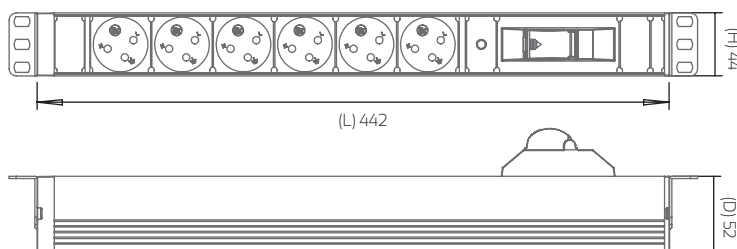

Power & Temperature:

Operating voltage: 250VAC 50VHz
Maximum current: 16A
Work Temperature: up to 70°C

Structure & color:

Solid and durable structure, you will find eufficio PDU reliable unit with long life expectation.
Materials: housing - aluminium, sockets - PC.

Modules & combination:

The eufficio PDU can be configured with MCB/RCCB/C13/C19/indication led

Cable and connection to power:

The eufficio PDU Has Built in input cable (HO5VV-F) with israeli plug/CEE plug

Testing: 100% testing continuity, polarity, insulation & earth


Certification: SII test certification

Warranty: 3 years Warranty

Installation:

supplied with installation brackets for attaching to rack in various angels.

Packing: each item in a box



* Pictures for illustration purposes only

Catalog No	Model	Output receptacles	Input plug type	Cord Type	Cord length	Protection	Led Indication
0726811930694	EP6ILM	6 x IL	IL	3X1.5mm ²	3m	MCB	✓
0726811930755	EP6ILM	6 x IL	CEE	3X2.5mm ²	5m	MCB	✓
0726811930717	EP9IL	6 x IL	IL	3X1.5mm ²	3m	RCCB	✓
0726811930724	EP9IL	9 x IL	IL	3X1.5mm ²	5m	—	—
0726811930731	EP6ILR	9 x IL	IL	3X1.5mm ²	3m	—	—
0726811930809	EP12C13M	12x C13	IL	3X1.5mm ²	3m	MCB	✓
0727363257406	EP12C13M	12x C13	CEE	3X2.5mm ²	5m	MCB	✓
0727363257420	EP12C13M	12x C13	CEE	3X2.5mm ²	5m	MCB	✓
0727363259042	EP12C13M	12x C13	C14	3X1.5mm ²	3m	MCB	✓
0726811930779	EP6C19M	6 x C19	IL	3X1.5mm ²	3m	MCB	✓
0727363257819	EP6C19M	6 x C19	CEE	3X1.5mm ²	5m	MCB	✓