GST Connectors

- 20A – 250VAC / *400VAC
- Max Cable diameter 3X2.5mm², *5X2.5mm²

EPN1104
GST 18/3
Male connector

EPN1114
GST 18/3
Female connector

EPN1314
GST 18/5
Male connector

EPN1304
GST 18/5
Female connector

EPNH4
GST Lock accessory

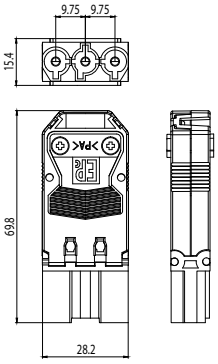



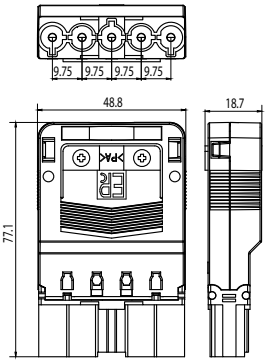

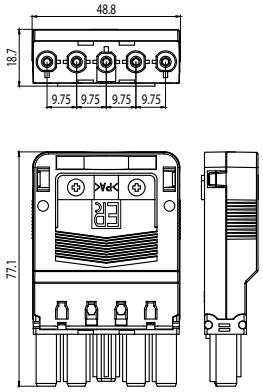



Certification

- VDE Germany
- Compliant with EN/IEC61535+A1
- Additional devices:

Specification

- Poles: 2P+E, *4P+E
- Rated current and voltage: 20A–250VAC, *400VAC,
- Maximum operating temperature: 100°C
- Flexible and rigid conductor section: 0.75-2.5mm²

Materials Characteristics

Housing : Polyamide 66 (94-V2 grade)
Metal Parts : Tin-Plate
Brass/Stainless
Steel Spring



Catalog No	Model	Description	Color	Length (L) mm	Width (W) mm	Height (H) mm
0769978901558	EPN1104	GST Male connector	Black	70	28.2	15.4
0769978901565	EPN1114	GST Female connector	Black	70	28.2	15.4
0727363256324	EPN1105	GST Male connector	White	70	28.2	15.4
0727363256331	EPN1115	GST Female connector	White	70	28.2	15.4
0726811931554	EPNH4	GST Lock accessory	Black	37	13.4	16
0727363256508	EPN1304	GST 3 phase Male connector	Black	77	48.8	18.7
0727363256515	EPN1314	GST 3 phase Female connector	Black	77	48.8	18.7