
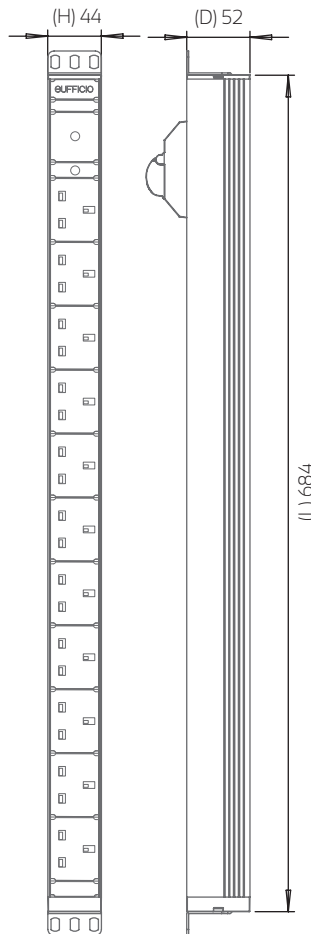
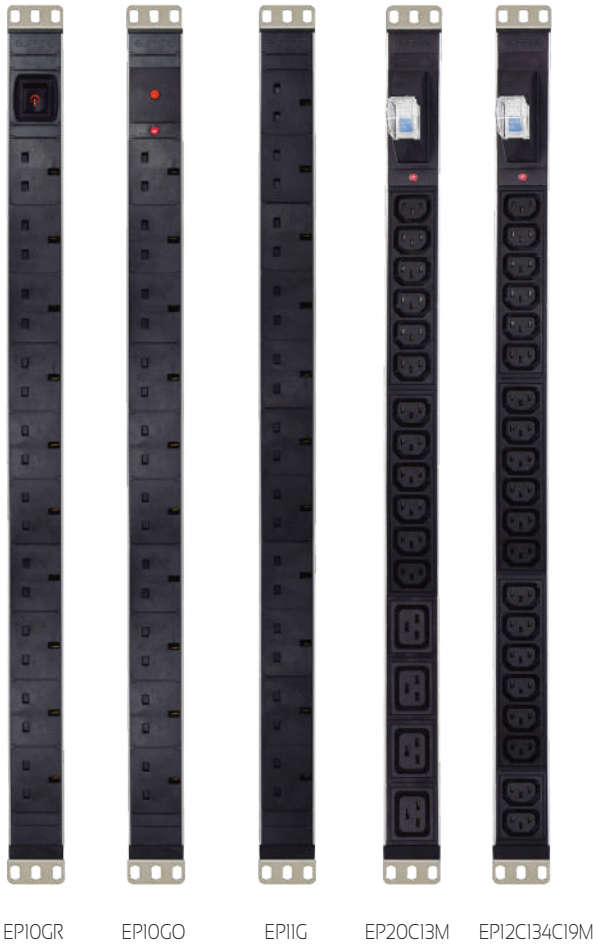


# Power Distribution Unit - 0U

## Installation configurations:

The 19" - 1U PDU's designed for installation in server and cabling racks

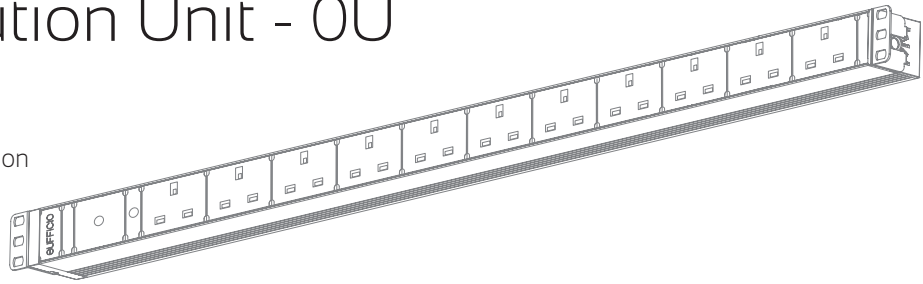

## Power & Temperature:

Operating voltage: 230VAC 50VHz  
 Maximum current: 13A  
 Work Temperature: up to 70°C

## Structure & color:

Solid and durable structure, you will find Eufficio PDU reliable unit with long life expectation.  
 Materials: housing - aluminium, sockets - PC.

## Modules & combination:

The Eufficio PDU can be configured with MCB/RCCB/C13/C19/indication led

## Cable and connection to power:

The Eufficio PDU Has Built in input cable (HO5VV-F) with UK plug/CEE plug

**Testing:** 100% testing continuity, polarity, insulation & earth


**Certifications:** BS 5733, CE

**Warranty:** 3 years Warranty

## Installation:

supplied with installation brackets for attaching to rack in various angles. Please read the installation instruction prior to installation.

**Packing:** each item in a box



Catalog No	Model	Output receptacles	Input plug type	Cord Type	Cord length	Protection	Led Indication
0727363255617	EPIIG	11 x BS	UK	3X1.5mm <sup>2</sup>	5m	—	—
0727363255624	EPIIG	11 x BS	CEE	3X2.5mm <sup>2</sup>	5m	—	—
0727363255631	EPIOGO	10 x BS	UK	3X1.5mm <sup>2</sup>	5m	Over-Load	✓
0727363255648	EPIOGO	10 x BS	CEE	3X2.5mm <sup>2</sup>	5m	Over-Load	✓
0727363255655	EPIOGR	10 x BS	UK	3X2.5mm <sup>2</sup>	5m	Rocker	✓
0727363256911	EP20C13M	20 x C13	CEE	3X1.5mm <sup>2</sup>	5m	MCB	✓
0727363256928	EPI2C134C19M	12 x C13  + 4 x C19	CEE	3X2.5mm <sup>2</sup>	5m	MCB	✓