
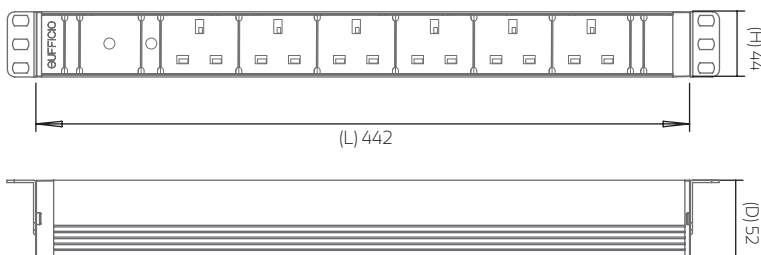


Power Distribution Unit - 1U

Installation configurations:

The 19" - 1U PDU's designed for installation in server and cabling racks

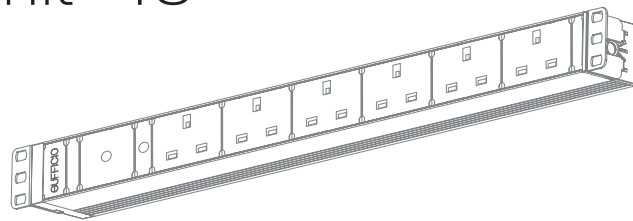

Power & Temperature:

Operating voltage: 230VAC 50VHz
 Maximum current: 13A
 Work Temperature: up to 70°C

Structure & color:

Solid and durable structure, you will find Eufficio PDU reliable unit with long life expectation.
 Materials: housing - aluminium, sockets - PC.

Modules & combination:

The Eufficio PDU can be configured with MCB/RCCB/C13/C19/indication led

Cable and connection to power:

The Eufficio PDU Has Built in input cable (HO5VV-F) with UK plug/CEE plug

Testing: 100% testing
 continuity, polarity, insulation & earth


Certifications: BS 5733, CE

Warranty: 3 years Warranty

Installation:

supplied with installation brackets for attaching to rack in various angles. Please read the installation instruction prior to installation.

Packing: each item in a box



Catalog No	Model	Output receptacles	Input plug type	Cord Type	Cord length	Module	Led Indication
0727363255532	EP7GR	7 x BS	UK	3X1.5mm ²	3m	Rocker	✓
0727363257062	EP7GR	7 x BS	C14	3X1.5mm ²	3m	Rocker	✓
0727363255549	EP6GO	6 x BS	UK	3X1.5mm ²	3m	Over-Load	✓
0727363255556	EP7G	7 x BS	UK	3X1.5mm ²	3m	—	—
0727363255563	EP5GM	5 x BS	UK	3X1.5mm ²	3m	MCB	✓
0727363255570	EP7GR	7 X BS	CEE	3X2.5mm ²	5m	Rocker	✓
0727363255587	EP5GM	5 X BS	CEE	3X2.5mm ²	5m	MCB	✓
0727363255594	EPI2C13M	12 x C13	UK	3X1.5mm ²	3m	MCB	✓
0727363257079	EPI2C13M	12 x C13	C20	3X2.5mm ²	3m	MCB	✓
0727363255600	EP6C19M	6 x C19	UK	3X1.5mm ²	3m	MCB	✓