


# Innera Molla

## Installation configurations:

### In Desk /In Surface

it mainly being placed in meeting room table, conference tables, desk and fine surfaces.

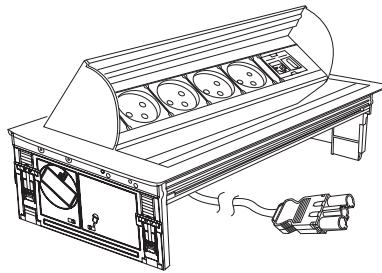


IM-62C



IM-63

Drawing for illustration: IM-63

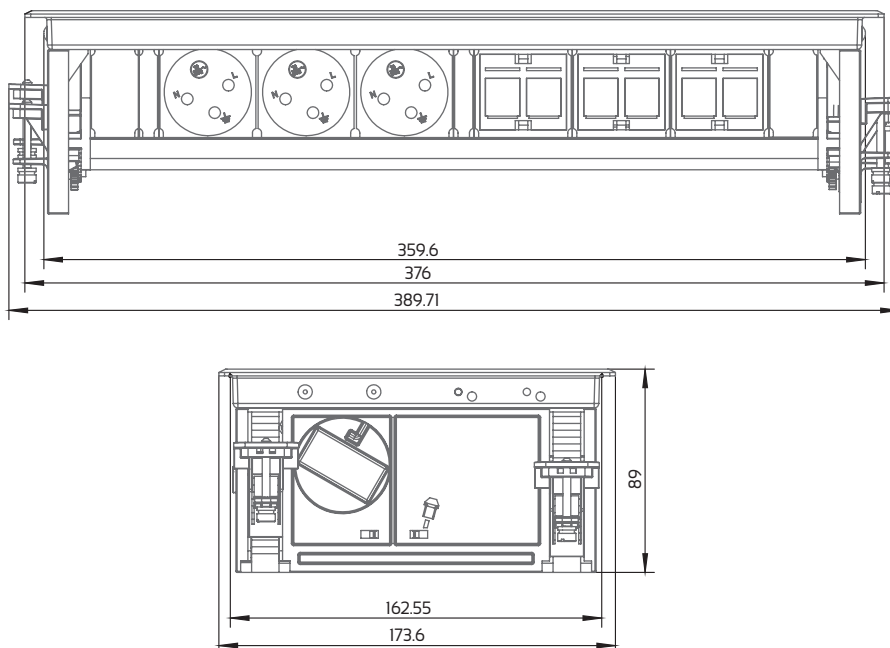

\* The product is suitable for surface 7 mm - 53 mm.

## Power & Temperature:

Operating voltage: 250VAC 50VHz

Maximum current: 16A

Work Temperature: up to 70°C

## Structure & color:

Flush, solid and durable structure, you will find Innera Molla is reliable unit with long life expectation.

Materials: cover - aluminium, sockets - PC.

## Modules & combination:

The Innera Molla can be configured with a combination of power, data, communication, or any other Keystone system component.

## Cable and connection to power:

The Innera Molla is supplied with 0.4 meter cable (HO5VV-F 3x2.5mm<sup>2</sup>) with male GST 18/3 connector. In order to connect the product to power you should buy the power cable separately.

**Testing:** 100% testing

continuity, polarity, insulation & earth

**Certification:** SII test certification

**Warranty:** 3 years Warranty by German registered company

**Installation:** Power saw, Power drill and hole cutter required, please read the installation instruction prior to installation.

**Packing:** each item in a box

Catalog No	Model	Description	Color	Length (L) mm	Width (W) mm	Height (H) mm
0727363258335	IM-62C	2 IL sockets , 2.4A USBx2 Charge, 4 keystones	Black	376	173.6	89
0727363258328	IM-63	3 IL sockets & 6 keystones	White	376	173.6	89